

THERMOWELL

(: Drilled Bar Stock Type Protection Tube) 가
(高溫), (高壓), (振動), (衝擊) (流速)
, 가
()

THERMOWELL (Bores & Depths)

(mm)	(mm)
4.0	500
5.5	700
7.0	800
8.5	1.000
10.0	1.200
11.0	1.200
12.0	1.200
16.0	1.200

THERMOWELL (Raw Material Sizes)

(Round Bar) O.D.: mm


25, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44,
46, 48, 50, 55

(Hexagonal Bar) O.D.: mm

26, 29, 32, 35, 38, 41

THERMOWELL

304 SS, 316 SS, 310 SS, 321 SS,
Hastelloy B, Hastelloy C, Hastelloy X,
Monel, , 50Co - 30Cr,

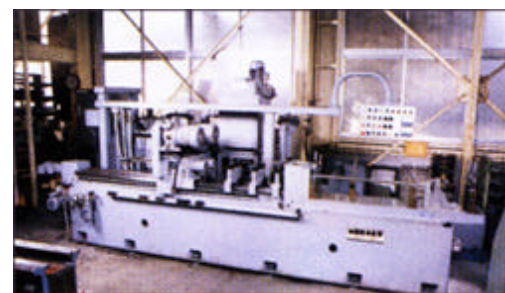


○
5 kg f/cm²

○ (靜水壓)
300 kg f/cm²

○ X-Ray

X

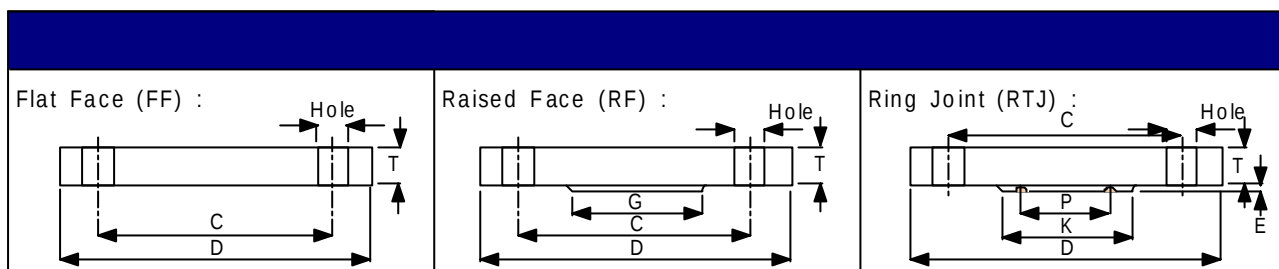

(Dimensional Specification)

			(mm)							(Bolts) mm		(Kg)
			(FF)		(RF)		(RTJ)			P.C.D C	- Ømm	
	A	B	D	T	G	F	K	P	E			
JIS 5 Kg	15	1/2	80	9	48	1	-	-	-	60	4 - 12	0.32
	20	3/4	85	10	52	1				65	4 - 12	0.41
	25	1 1/4	95	10	62	1				75	4 - 12	0.52
	32	1 1/2	115	12	72	2				90	4 - 15	0.91
	40	1 1/2	120	14	78	2				95	4 - 15	0.99
JIS 10 Kg	15	1/2	95	12	52	1				70	4 - 15	0.63
	20	3/4	100	14	58	1				75	4 - 15	0.78
	25	1	125	14	70	1				90	4 - 19	1.22
	32	1 1/4	135	16	80	2				100	4 - 19	1.66
	40	1 1/2	140	16	85	2				105	4 - 19	1.80
ANSI 150 lbs	15	1/2	89	15.9	35	1.6	-	-	-	60.5	4 - 15.8	0.5
	20	3/4	98	15.9	43	1.6	-	-	-	70.0	4 - 15.8	0.9
	25	1	108	17.5	51	1.6	63.5	47.62	6.4	79.5	4 - 15.8	0.9
	32	1 1/4	117	20.6	64	1.6	73.0	57.15	6.4	89.0	4 - 15.8	1.4
	40	1 1/2	127	22.2	73	1.6	82.6	65.08	6.4	98.5	4 - 15.8	1.8
ANSI 300 lbs	15	1/2	95	22.2	35	1.6	50.8	34.13	5.6	66.5	4 - 15.8	0.9
	20	3/4	117	25.4	43	1.6	63.5	42.86	6.4	82.5	4 - 19.0	1.4
	25	1	124	27.0	51	1.6	69.8	50.80	6.4	89.0	4 - 19.0	1.4
	32	1 1/4	133	27.0	64	1.6	79.4	60.32	6.4	98.5	4 - 19.0	2.0
	40	1 1/2	156	30.2	73	1.6	90.5	68.26	6.4	114.5	4 - 22.2	2.7
ANSI 600 lbs	15	1/2	95	22.2	35	6.4	50.8	34.13	5.6	66.5	4 - 15.8	0.9
	20	3/4	117	25.4	43	6.4	63.5	42.86	6.4	82.5	4 - 19.0	1.4
	25	1	124	27.0	51	6.4	69.8	50.80	6.4	89.0	4 - 19.0	1.8
	32	1 1/4	159	28.6	64	6.4	79.4	60.32	6.4	98.5	4 - 19.0	2.6
	40	1 1/2	178	31.8	73	6.4	90.5	68.26	6.4	114.5	4 - 22.2	3.6
ANSI 900 lbs	15	1/2	121	31.8	35	6.4	60.3	39.68	6.4	82.5	4 - 22.2	1.8
	20	3/4	130	34.9	43	6.4	66.7	44.45	6.4	89.0	4 - 22.2	2.7
	25	1	149	41.3	51	6.4	71.4	50.80	6.4	101.5	4 - 25.4	3.6
	32	1 1/4	159	41.3	64	6.4	81.0	60.32	6.4	111.0	4 - 25.4	4.7
	40	1 1/2	178	44.4	73	6.4	92.1	68.26	6.4	124.0	4 - 28.5	5.9

* DIN, IEC

가



Hexagonal Screwed-in Type	Flanged(Screwed-in) Type
Hexagonal Screwed-in Type	Flanged(Weld) Type
Hexagonal Lagging Extension Type	Flanged(Weld) Type
Hexagonal Lagging Extension Type	Plain Weld Type
Hexagonal Heavy Duty Type	Weld Type
Hexagonal Heavy Duty Type	Ball Joint Type
Screwed-in Weld Type	Van Stone Type